

Part Number: 5-3734

Color: Black

Nominal OAG: 0.410" +/- .030

Plies: 3

Fabric: Polyester/Nylon

Minimum Pulley Diameter: See Chart Below

Top Surface: 3/16" Smooth Cover

Bottom Surface: 1/16" Smooth Cover

Compound: NBR

Work Tension: 330 lbs./PIW


Elongation: Less than 4%

Weight P.I.W. / Ft.: .217 lbs.

Working Temperature: -20F to 250F

Joining Method: Lap Splice; Lacing

Description: 330 3/16 x 1/16 HA

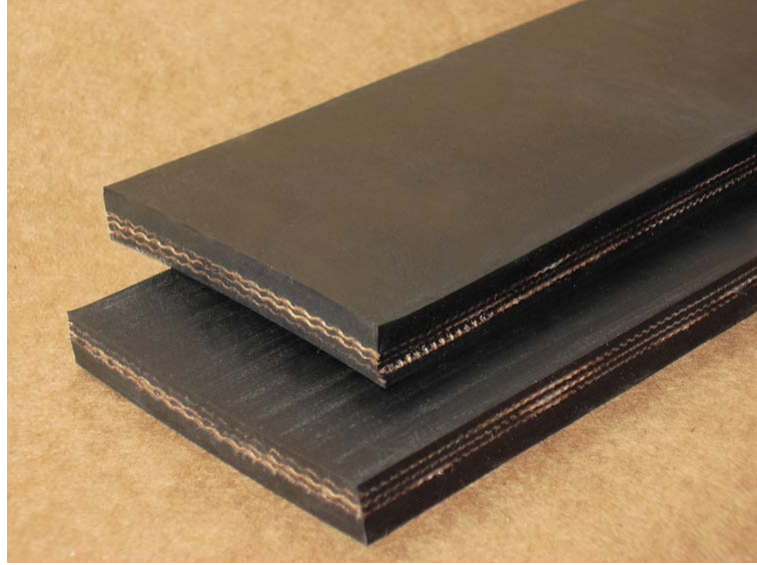

Features: 5-3734 features a compound designed to service a combination of high temperature and oil. It has good abrasion resistance and retains flexibility in environments up to 350F in many applications.

Applications: 330 3/16 x 1/16 HA is popular carrying hot asphalt, oily grains and oil treated coal. It is also used in sewage treatment where oil can be a problem.
